




FAG 2202-2RS-TVH Self-Aligning Ball Bearings

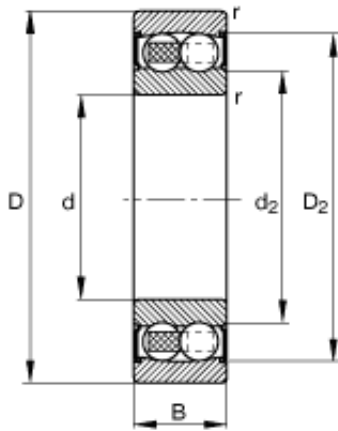

2202-2RS-TVH Bearing 2D drawings and 3D CAD models

Bearing No. 2202-2RS-TVH

| | |
|--------------------|---------------------------------------|
| Size | 15x35x14 mm |
| Bore Diameter | 15 mm |
| Outer Diameter | 35 mm |
| Width | 14 mm |
| d | 15 mm |
| D | 35 mm |
| B | 14 mm |
| D ₂ | 31 mm |
| D _{a max} | 30,8 mm |
| d ₂ | 19 mm |
| d _{a min} | 19,2 mm |
| r _{a max} | 0,6 mm |
| r _{min} | 0,6 mm |
| m | 0,061 kg / Weight |
| C _r | 7700 N / Dynamic load rating (radial) |
| e | 0,34 |
| Y ₁ | 1,86 |
| Y ₂ | 2,88 |
| C _{0r} | 1730 N / Static load rating (radial) |
| Y ₀ | 1,95 |
| n _G | 15000 1/min / Limiting speed |
| n _B | 1/min / Reference speed |
| C _{ur} | 108 N / Fatigue limit load, |



HRGM INDUSTRIES S.A.

| | |
|--|--------|
| | radial |
|--|--------|